

POWR-GARD® Fuse Datasheet



Expertise Applied | Answers Delivered

LVSP SURGE SUPPRESSION FUSE

600 Vac • 5-100 kA



Description

The Littelfuse® Varistor Protection (LVSP) Fuses are intended for the protection of TVSS products. The LVSP series has been designed to survive the 8 x 20 μs lightning surges described in various standards (UL 1449, IEC 61000-4-5 and IEEE C62.41) without opening. This allows the TVSS to perform the necessary suppression. The LVSP is not rated for continuous current and the ratings are specific 8 x 20 μs surge capability. The LVSP series can be used to facilitate TVSS module compliance to UL 1449 in permanently connected applications (abnormal overvoltage, unlimited current conditions).

Features/Benefits

- Very current limiting under AC short-circuit conditions
- Available in multiple mounting configurations (cartridge, bolt-in, PC board mount)
- Provides short circuit protection in TVSS systems and complements the Littelfuse line of overvoltage products (HA, HB34, TMOV® and iTMOV® varistors as well as the AK-10 series TVS diodes)

Applications

- TVSS products
- Surge arrestors


Electrical Specifications

SURGE RATING	RATING CODE	VOLTAGE RATING (A)	INTERRUPT RATING (kA)	CARTRIDGE		LEADED		BOLT-IN		8 X 20 μS SURGE RATING	NOMINAL MELTING I ² T (A ² S)	NOMINAL CLEARING I ² T (A ² S)	I _{peak} @100 kHz (A)
				CATALOG NUMBER	ORDERING NUMBER	CATALOG NUMBER	ORDERING NUMBER	CATALOG NUMBER	ORDERING NUMBER				
5	0005	600	200	LVSP5-2	LVSP0005TX2	LVSP5-R	LVSP0005TXR	-	-	5,000	359	981	3,700
10	0010	600	200	LVSP10-2	LVSP0010TX2	LVSP10-R	LVSP0010TXR	-	-	10,000	1,300	3,210	5,823
15	0015	600	200	LVSP15-2	LVSP0015TX2	LVSP15-R	LVSP0015TXR	-	-	15,000	3,267	6,235	7,765
20	0020	600	200	LVSP20-2	LVSP0020TX2	LVSP20-R	LVSP0020TXR	-	-	20,000	4,940	11,710	8,135
30	0030	600	200	LVSP30-2	LVSP0030TX2	-	-	LVSP30	LVSP0030T	30,000	11,950	35,325	12,478
40	0040	600	200	LVSP40-2	LVSP0040TX2	-	-	LVSP40	LVSP0040T	40,000	20,550	61,700	15,250
60	0060	600	200	LVSP60-2	LVSP0060TX2	-	-	LVSP60	LVSP0060T	60,000	39,240	145,555	19,604
80	0080	600	200	LVSP80-2	LVSP0080TX2	-	-	LVSP80	LVSP0080T	80,000	75,000	254,000	24,600
100	0100	600	200	-	-	-	-	LVSP100-L	LVSP0100VXL	100,000	Contact Factory		

Specifications

Voltage Rating	600 Vac
Interrupting Rating	200 kA
Ratings	5 – 100 kA 8 x 20 μs surge withstand
Approvals	UL Recognized (File: E71611)
Environmental	RoHS Compliant

Part Numbering System

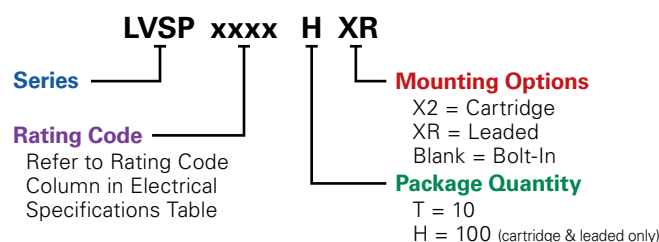

SERIES	SURGE RATING	RATING CODE	PACKAGE QUANTITY	MOUNTING METHOD	CATALOG NUMBER	ORDERING NUMBER
LVSP	5	0005	10	CARTRIDGE	LVSP05-2	LVSP0005TX2
LVSP	15	0015	10	CARTRIDGE	LVSP15-2	LVSP0015TX2
LVSP	20	0020	100	LEADED	LVSP20-R	LVSP0020HXR
LVSP	80	0080	10	BOLT-IN	LVSP80	LVSP0080T

Recommended Fuse Blocks

- LVSP (5-20)-2**
L60030M (open block) • LFPSM (dead front)
- LVSP (30-80)-2**
LFJ60030 (open block) • LFPSJ30 (dead front)
- LVSP (100)**
LFJ60100 (open block)

Web Resources

Download other technical information:
littelfuse.com/lvsp


POWR-GARD® Fuse Datasheet




LVSP SURGE SUPPRESSION FUSE

Dimensions Inches (mm)


Cartridge 5-20 A




Leaded 5-20 A

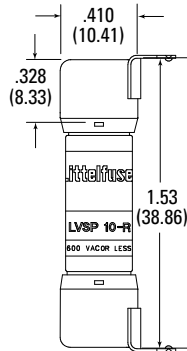

Cartridge 30-80 A

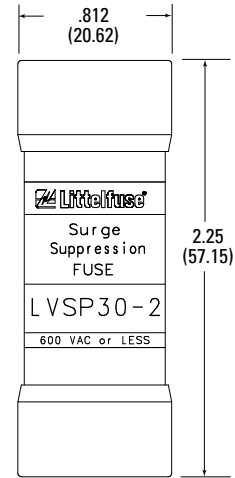

Bolt-In 30-80 A

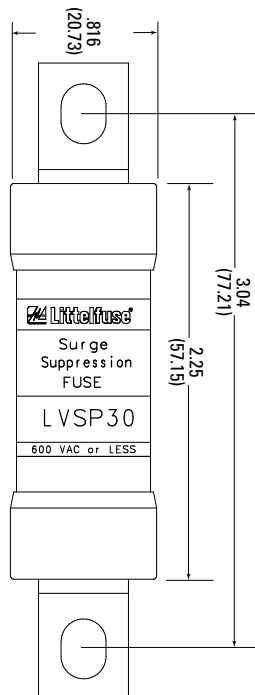

Bolt-In 100 A

