

Protection Relays

Pump Controls and Liquid Level Controls



Expertise Applied | Answers Delivered


PC-XXX-LLC-CZ / PC-XXX-LLC-GM SERIES

Liquid level control




Wiring Diagram

TYPICAL WIRING DIAGRAM FOR PC-XXX-LLC-CZ

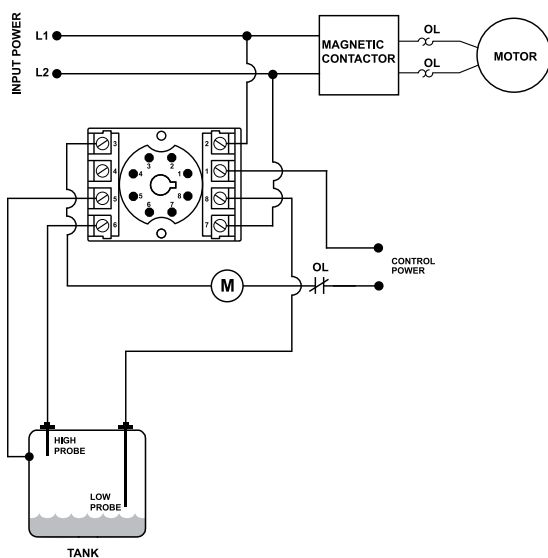

TYPICAL WIRING DIAGRAM FOR PC-XXX-LLC-GM

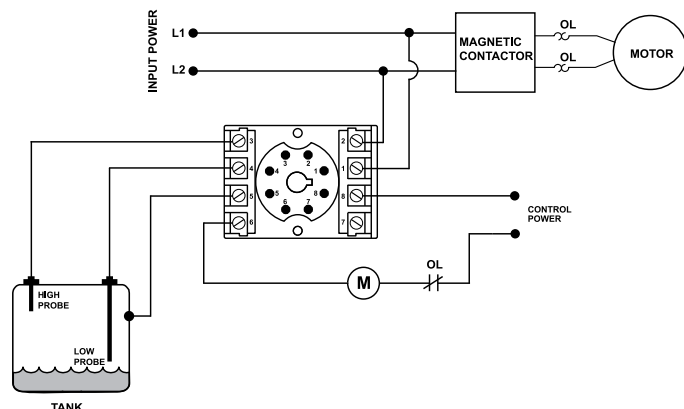

Description

The PC-xxx-LLC-CZ and PC-xxx-LLC-GM Series are liquid level control relays used to control conductive liquid pumping operations in a pump-up or pump-down application. The units come in two different voltage ranges (see specs below).

The units have an adjustable sensitivity knob (4.7k to 100k ohms) that is set according to the resistance level at which you want the probes (sold separately) to sense the conductive liquid. The units have a built-in debounce time delay that prevents the relay from energizing if the probe resistance momentarily goes above or below the sensitivity setpoint (due to liquid splashing in the tank).

The units operate their internal relay based on inputs from a high and low probe and a common reference (when a conductive tank is used) or common probe (when a non-conductive tank is used).

PC-xxx-LLC-CZ

- Compatible with Crouzet's PNR & PNRU series liquid level control

PC-xxx-LLC-GM

- Compatible with Gems' Series 16M general purpose control

Must use Model OT08PC or P1011-6 socket for UL Rating!

Note: Manufacturer's recommended screw terminal torque for the OT Series Octal Sockets is 12 in.-lbs.

Features & Benefits

FEATURES	BENEFITS
Debounce time delay (2 seconds)	Prevents rapid cycling of the pump due to turbulence in the tank
Adjustable sensitivity (4.7 to 100Kohms)	Allows user to fine tune the sensing resistance to prevent false tripping due to foam or debris
Dual probe design (plus a common)	Allows user the ability to set the level differential required

Ordering Information

MODEL	LINE VOLTAGE	DESCRIPTION
PC-100-LLC-CZ	95-120VAC	Compatible with Crouzet's PNR & PNRU Series liquid level control
PC-200-LLC-CZ	190-240VAC	Compatible with Crouzet's PNR & PNRU Series liquid level control
PC-100-LLC-GM	95-120VAC	Compatible with Gems' Series 16M liquid level control
PC-200-LLC-GM	190-240VAC	Compatible with Gems' Series 16M liquid level control

Protection Relays

Pump Controls and Liquid Level Controls



Expertise Applied | Answers Delivered

PC-XXX-LLC-CZ / PC-XXX-LLC-GM SERIES**Accessories****OT08PC 8-pin Octal Socket**

Octal Socket for plug-in units. 8-pin surface & DIN rail mountable. Rated for 10A @ 600VAC.

Specifications**Input Characteristics****Supply Voltage****PC-100-LLC-CZ** 95-120VAC**PC-100-LLC-GM** 95-120VAC**PC-200-LLC-CZ** 190-240VAC**PC-200-LLC-GM** 190-240VAC**Frequency** 50/60Hz**Functional Characteristics****Probe Sense Voltage** 5VDC pulsed**Debounce Time Delay** 2 seconds**Probe Sensitivity** 4.7k to 100k Adjustable**Output Characteristics****Output Contact Rating****Pilot Duty** 480VA @ 240VAC**General Purpose** 10A @240VAC**General Characteristics****Temperature Range** -40° to 70°C (-40° to 158°F)**Maximum Input Power** 5 W**Standards Passed****Electrostatic Discharge (ESD)** IEC 61000-4-2, Level 3, 6kV contact, 8kV air.**Radio Frequency Immunity (RFI)** 150MHz, 10V/m**Fast Transients** IEC 61000-4-4, Level 3, 2kV input power and controls**Safety Marks****UL (OT08PC octal socket required)**

UL508 (File #E68520)

CE

IEC60947-6-2

Dimensions**H** 44.45 mm (1.75"); **W** 60.33 mm (2.375");**D** 104.78 mm (4.125")**Weight**

0.65 lb. (10.4 oz., 294.84 g)

Mounting Method

DIN rail or surface mount

(plug into OT08PC socket)

Socket Available

Model OT08PC (UL Rating 600V)

The 600V socket can be surface mounted or installed on DIN Rail.